



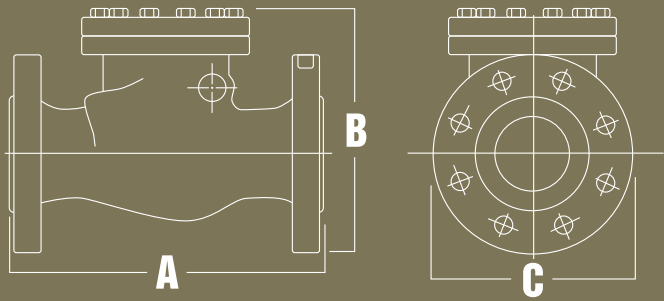

Valve Size	ANSI Class	Working Pressure	A(in)		B (in)	C (in)	Weight (lbs)
			RF	RTJ			
2"	150	275	8	—	8	6	30
	300	720	10 1/2	—	8	6 1/2	35
	600	1440	11 1/2	11 5/8	8 3/8	6 1/2	53
3"	150	275	9 1/2	—	10 1/8	7 1/2	58
	300	720	12 1/2	—	10 9/16	8 1/4	74
	600	1440	14	14 1/8	10 7/8	8 1/4	90
4"	150	275	11 1/2	—	11 1/2	9	85
	300	720	14	—	12 1/16	10	117
	600	1440	17	17 1/8	12 7/8	10 3/4	165
6"	150	275	14	—	13 3/16	11	135
	300	720	17 1/2	—	14 5/8	12 1/2	205
	600	1440	22	22 1/8	16 1/4	14	325
8"	150	275	19 1/2	—	16 11/16	13 1/2	245
	300	720	21	—	17 7/8	15	350
	600	1440	26	26 1/8	19 7/8	16 1/2	570

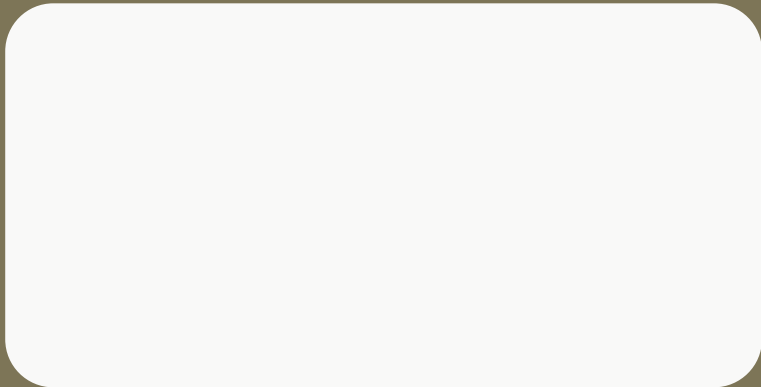

GATORVALVE

GVI

check valves
sizes 2" through 8"
pressure: 150, 300, 600



43,000 SQUARE FEET OF MANUFACTURING AND WAREHOUSING TO BETTER SERVE OUR CUSTOMERS.

FEATURES:


- Body material ASTM A216 grade WCC
- Field repairable top entry design
- Easy field identification
 - Series 90: Grade 8 capscrews on bonnet area
 - Series 91: B7 plated studs and nuts on bonnet area
- 316 stainless steel trim “standard”
- Thru-conduit design
- Suitable for vertical flow up or horizontal installation
- 1/2" NPT tap in bonnet
- Every valve hydro-tested



NON-REMOVABLE SEAT **SERIES 90**

BILL OF MATERIALS

NUMBER	NAME OF PART	MATERIAL
1	BODY	ASTM A216 GR. WCC
2	BONNET	ASTM A105 LF2 / 4130 NQ&T
3	CLAPPER	ASTM A351 CF8M (316)
4	CLAPPER PIN	316 STAINLESS STEEL
5	CAP SCREW	GR.8
6	CLAPPER SEAL	VITON - V 75
7	BONNET SEAL	VITON - V 75
8	PIN PLUGS	FORGED STEEL
9	NPT PLUG	FORGED STEEL
	NAME PLATE	STAINLESS STEEL

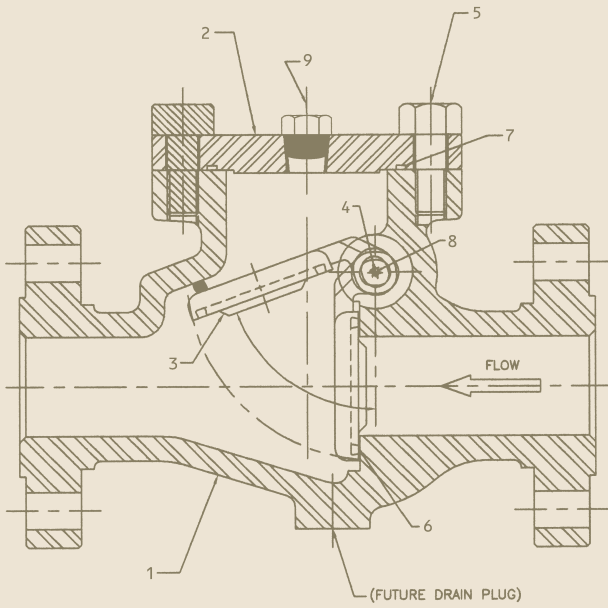

REMOVABLE SEAT **SERIES 91**

BILL OF MATERIALS

NUMBER	NAME OF PART	MATERIAL
1	BODY	ASTM A216 GR. WCC
2	BONNET	ASTM A105 LF2 / 4130 NQ&T
3	CLAPPER	ASTM A351 CF8M (316)
4	CLAPPER PIN	316 STAINLESS STEEL
5	REMOVABLE SEAT	316 / 316L
6	BONNET STUDS	ASTM 193 GR. B7
7	BONNET NUTS	ASTM 194 GR. 2H
8	FRONT SEAT SEAL	VITON - V 75
9	BACK SEAT SEAL	VITON - V 75
10	BONNET SEAL	VITON - V 75
11	PIN PLUGS	FORGED STEEL
12	NPT PLUG	FORGED STEEL
	NAME PLATE	STAINLESS STEEL

